

Low-temperature Gages

KFL

- Gage Factor Approx. 2.1
- Applicable Linear Expansion Coefficients 5, 11, 16, 23
- Self-temperature-compensation Range -196 to 50°C

Applicable Adhesives and Operating Temperature Ranges

UC-26: -196 to 50°C (mainly for concrete and lumber)
 UC-27A: -269 to 70°C (mainly for metal)
 PC-6: -269 to 150°C
 CC-33A: -196 to 150°C













Low-temperature Foil Strain Gages

The gage element is made of NiCr alloy, which exhibits excellent characteristics under low-temperature environments and is sandwiched between polyimide films. Thus, the KFL gages are suitable for strain measurement of tanks and vessels containing low-temperature liquids such as LNG and LPG.

Types, lengths and codes of leadwire cables pre-attached to KFL gages

Type	2 polyester-coated copper wires	3 polyester-coated copper wires	Middle-temp. 2-wire cable	Middle-temp. 3-wire cable	Fluoroplastic-coated high/low-temp. 3-wire cable
Length	C1, D25				
2 cm	N2C2	N2C3			
3	N3C2	N3C3			
4	N4C2	N4C3			
5	N5C2	N5C3			
10	N10C2	N10C3			
15	N15C2	N15C3	R15C2	R15C3	F15C3
30	N30C2	N30C3	R30C2	R30C3	F30C3
50	N50C2	N50C3	R50C2	R50C3	F50C3
1 m	N1M2	N1M3	R1M2	R1M3	F1M3
2			R2M2	R2M3	F2M3
3			R3M2	R3M3	F3M3
4			R4M2	R4M3	F4M3
5			R5M2	R5M3	F5M3
6			R6M2	R6M3	F6M3
8			R8M2	R8M3	F8M3
10			R10M2	R10M3	F10M3
15			R15M2	R15M3	F15M3
20			R20M2	R20M3	F20M3
30 m			R30M2	R30M3	F30M3
Oprg. temp. range	-269 to 150°C		-100 to 150°C		-269 to 150°C
Remarks	Twisted for 50cm and 1m long		L-11	L-12	L-3









KFL Gages ● Uniaxial 120Ω

Pattern	Leadwire Cable – Type and Shape	Operating Temp. Range	Leadwire Length	Model
KFL-5-120-C1-11 16 23	Fluoroplastic-coated high/low-temp. 3-wire cable L-3 	-269 to 150°C	1m	KFL-5-120-C1-11 F1M3
			3m	KFL-5-120-C1-11 F3M3
			5m	KFL-5-120-C1-11 F5M3
	Middle-temperature 3-wire cable L-12 	-100 to 150°C	1m	KFL-5-120-C1-11 R1M3
			3m	KFL-5-120-C1-11 R3M3
			5m	KFL-5-120-C1-11 R5M3
	Middle-temperature 2-wire cable L-11 	-100 to 150°C	1m	KFL-5-120-C1-11 R1M2
			3m	KFL-5-120-C1-11 R3M2
			5m	KFL-5-120-C1-11 R5M2
	3 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-5-120-C1-11 N30C3
			50cm	KFL-5-120-C1-11 N50C3
			50cm*1m	KFL-5-120-C1-11 N1M3
	2 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-5-120-C1-11 N30C2
			50cm	KFL-5-120-C1-11 N50C2
			50cm*1m	KFL-5-120-C1-11 N1M2
Silver-clad copper wires 	-269 to 150°C	25mm	KFL-5-120-C1-11	
KFL-2-120-C1-11 16 23	Fluoroplastic-coated high/low-temp. 3-wire cable L-3 	-269 to 150°C	1m	KFL-2-120-C1-11 F1M3
			3m	KFL-2-120-C1-11 F3M3
			5m	KFL-2-120-C1-11 F5M3
	Middle-temperature 3-wire cable L-12 	-100 to 150°C	1m	KFL-2-120-C1-11 R1M3
			3m	KFL-2-120-C1-11 R3M3
			5m	KFL-2-120-C1-11 R5M3
	Middle-temperature 2-wire cable L-11 	-100 to 150°C	1m	KFL-2-120-C1-11 R1M2
			3m	KFL-2-120-C1-11 R3M2
			5m	KFL-2-120-C1-11 R5M2
	3 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-2-120-C1-11 N30C3
			50cm	KFL-2-120-C1-11 N50C3
			50cm*1m	KFL-2-120-C1-11 N1M3
	2 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-2-120-C1-11 N30C2
			50cm	KFL-2-120-C1-11 N50C2
			50cm*1m	KFL-2-120-C1-11 N1M2
Silver-clad copper wires 	-269 to 150°C	25mm	KFL-2-120-C1-11	











- Uniaxial**
- Base Size 10 x 3.7 mm
 - Gage Length 5 mm
 - Gage Resistance 120Ω
 - Pieces per Pack 10

- Uniaxial**
- Base Size 6 x 3.7 mm
 - Gage Length 2 mm
 - Gage Resistance 120Ω
 - Pieces per Pack 10

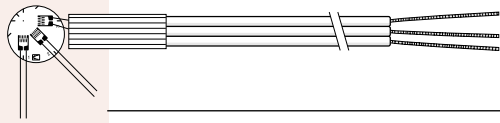










KFL Gages ● Uniaxial 120Ω

Pattern	Leadwire Cable – Type and Shape	Operating Temp. Range	Leadwire Length	Model	
KFL-1-120-C1-11 16 23	Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-269 to 150°C	1m	KFL-1-120-C1-11 F1M3	
			3m	KFL-1-120-C1-11 F3M3	
			5m	KFL-1-120-C1-11 F5M3	
		Middle-temperature 3-wire cable L-12	-100 to 150°C	1m	KFL-1-120-C1-11 R1M3
		3m		KFL-1-120-C1-11 R3M3	
		5m		KFL-1-120-C1-11 R5M3	
	Middle-temperature 2-wire cable L-11	-100 to 150°C	1m	KFL-1-120-C1-11 R1M2	
			3m	KFL-1-120-C1-11 R3M2	
			5m	KFL-1-120-C1-11 R5M2	
	2 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-1-120-C1-11 N30C2	
			50cm	KFL-1-120-C1-11 N50C2	
			1m	KFL-1-120-C1-11 N1M2	
Uniaxial ● Base Size 4 x 2.7 mm ● Gage Length 1 mm ● Gage Resistance 120Ω ● Pieces per Pack 10	Silver-clad copper wires	-269 to 150°C	25mm	KFL-1-120-C1-11	
	KFL-05-120-C1-11 16 23	Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-269 to 150°C	1m	KFL-05-120-C1-11 F1M3
				3m	KFL-05-120-C1-11 F3M3
				5m	KFL-05-120-C1-11 F5M3
			Middle-temperature 3-wire cable L-12	-100 to 150°C	1m
			3m		KFL-05-120-C1-11 R3M3
			5m		KFL-05-120-C1-11 R5M3
		Middle-temperature 2-wire cable L-11	-100 to 150°C	1m	KFL-05-120-C1-11 R1M2
				3m	KFL-05-120-C1-11 R3M2
				5m	KFL-05-120-C1-11 R5M2
	2 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-05-120-C1-11 N30C2	
			50cm	KFL-05-120-C1-11 N50C2	
1m			KFL-05-120-C1-11 N1M2		
Uniaxial ● Base Size 3.3 x 2.7 mm ● Gage Length 0.5 mm ● Gage Resistance 120Ω ● Pieces per Pack 10	Silver-clad copper wires	-269 to 150°C	25mm	KFL-05-120-C1-11	












KFL Gages ● Uniaxial 120Ω/Triaxial 120Ω

Pattern	Leadwire Cable – Type and Shape	Operating Temp. Range	Leadwire Length	Model	
KFL-02-120-C1-11 16 23 Uniaxial ● Base Size 2.5 x 2.2 mm ● Gage Length 0.2 mm ● Gage Resistance 120Ω ● Pieces per Pack 10	Fluoroplastic-coated high/low-temp. 3-wire cable L-3 	-269 to 150°C	1m	FL-02-120-C1-11 F1M3	
			3m	KFL-02-120-C1-11 F3M3	
			5m	KFL-02-120-C1-11 F5M3	
		Middle-temperature 3-wire cable L-12 	-100 to 150°C	1m	KFL-02-120-C1-11 R1M3
		3m		KFL-02-120-C1-11 R3M3	
		5m		KFL-02-120-C1-11 R5M3	
		Middle-temperature 2-wire cable L-11 	-100 to 150°C	1m	KFL-02-120-C1-11 R1M2
		3m		KFL-02-120-C1-11 R3M2	
		5m		KFL-02-120-C1-11 R5M2	
		2 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-02-120-C1-11 N30C2
		50cm		KFL-02-120-C1-11 N50C2	
		1m		KFL-02-120-C1-11 N1M2	
	Silver-clad copper wires 	-269 to 150°C	25mm	KFL-02-120-C1-11	
KFL-1-120-D25-11 16 23 Triaxial, 0°/90°/45° ● Base Size 8 mmφ ● Gage Length 1 mm ● Gage Resistance 120Ω ● Pieces per Pack 5	Fluoroplastic-coated high/low-temp. 3-wire cable L-3 	-269 to 150°C	1m	KFL-1-120-D25-11 F1M3	
			3m	KFL-1-120-D25-11 F3M3	
			5m	KFL-1-120-D25-11 F5M3	
		Middle-temperature 3-wire cable L-12 	-100 to 150°C	1m	KFL-1-120-D25-11 R1M3
		3m		KFL-1-120-D25-11 R3M3	
		5m		KFL-1-120-D25-11 R5M3	
		Middle-temperature 2-wire cable L-11 	-100 to 150°C	1m	KFL-1-120-D25-11 R1M2
		3m		KFL-1-120-D25-11 R3M2	
		5m		KFL-1-120-D25-11 R5M2	
		2 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-1-120-D25-11 N30C2
		50cm		KFL-1-120-D25-11 N50C2	
		1m		KFL-1-120-D25-11 N1M2	
	Silver-clad copper wires 	-269 to 150°C	25mm	KFL-1-120-D25-11	









KFL Gages ● Triaxial 120Ω/Uniaxial 350Ω

Pattern	Leadwire Cable – Type and Shape	Operating Temp. Range	Leadwire Length	Model	
KFL-05-120-D25-11 16 23 Triaxial, 0°/90°/45° ● Base Size 7.5 mmφ ● Gage Length 0.5 mm ● Gage Resistance 120Ω ● Pieces per Pack 5	Fluoroplastic-coated high/low-temp. 3-wire cable L-3 	-269 to 150°C	1m	KFL-05-120-D25-11 F1M3	
			3m	KFL-05-120-D25-11 F3M3	
			5m	KFL-05-120-D25-11 F5M3	
		Middle-temperature 3-wire cable L-12 	-100 to 150°C	1m	KFL-05-120-D25-11 R1M3
		3m		KFL-05-120-D25-11 R3M3	
		5m		KFL-05-120-D25-11 R5M3	
		Middle-temperature 2-wire cable L-11 	-100 to 150°C	1m	KFL-05-120-D25-11 R1M2
		3m		KFL-05-120-D25-11 R3M2	
		5m		KFL-05-120-D25-11 R5M2	
		2 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-05-120-D25-11 N30C2
		50cm		KFL-05-120-D25-11 N50C2	
		1m		KFL-05-120-D25-11 N1M2	
	Silver-clad copper wires 	-269 to 150°C	25mm	KFL-05-120-D25-11	
KFL-5-350-C1-11 16 23 Uniaxial ● Base Size 10 x 3.7 mm ● Gage Length 5 mm ● Gage Resistance 350Ω ● Pieces per Pack 10	Fluoroplastic-coated high/low-temp. 3-wire cable L-3 	-269 to 150°C	1m	KFL-5-350-C1-11 F1M3	
			3m	KFL-5-350-C1-11 F3M3	
			5m	KFL-5-350-C1-11 F5M3	
		Middle-temperature 3-wire cable L-12 	-100 to 150°C	1m	KFL-5-350-C1-11 R1M3
		3m		KFL-5-350-C1-11 R3M3	
		5m		KFL-5-350-C1-11 R5M3	
		Middle-temperature 2-wire cable L-11 	-100 to 150°C	1m	KFL-5-350-C1-11 R1M2
		3m		KFL-5-350-C1-11 R3M2	
		5m		KFL-5-350-C1-11 R5M2	
		3 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-5-350-C1-11 N30C3
		50cm		KFL-5-350-C1-11 N50C3	
		1m		KFL-5-350-C1-11 N1M3	
	2 polyester-coated copper wires 	-269 to 150°C	30cm	KFL-5-350-C1-11 N30C2	
	50cm		KFL-5-350-C1-11 N50C2		
	1m		KFL-5-350-C1-11 N1M2		
	Silver-clad copper wires 	-269 to 150°C	25mm	KFL-5-350-C1-11	

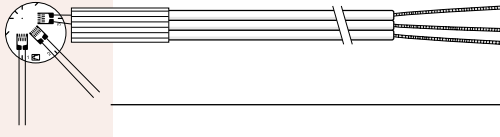




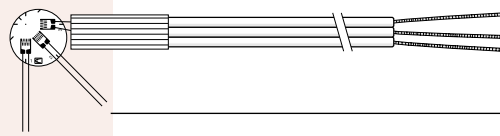




KFL Gages ● Uniaxial 350Ω

Pattern	Leadwire Cable - Type and Shape	Operating Temp. Range	Leadwire Length	Model					
KFL-2-350-C1-11 16 23	Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-296 to 150°C	1m	KFL-2-350-C1-11 F1M3					
			3m	KFL-2-350-C1-11 F3M3					
			5m	KFL-2-350-C1-11 F5M3					
	Middle-temperature 3-wire cable L-12		-100 to 150°C	1m	KFL-2-350-C1-11 R1M3				
				3m	KFL-2-350-C1-11 R3M3				
				5m	KFL-2-350-C1-11 R5M3				
	Middle-temperature 2-wire cable L-11		-100 to 150°C	1m	KFL-2-350-C1-11 R1M2				
				3m	KFL-2-350-C1-11 R3M2				
				5m	KFL-2-350-C1-11 R5M2				
	3 polyester-coated copper wires	 30cm 50cm 50cm·1m	-296 to 150°C	30cm	KFL-2-350-C1-11 N30C3				
				50cm	KFL-2-350-C1-11 N50C3				
				1m	KFL-2-350-C1-11 N1M3				
	2 polyester-coated copper wires	 30cm 50cm 50cm·1m	-296 to 150°C	30cm	KFL-2-350-C1-11 N30C2				
				50cm	KFL-2-350-C1-11 N50C2				
				1m	KFL-2-350-C1-11 N1M2				
	Uniaxial ● Base Size 6 x 3.7 mm ● Gage Length 2 mm ● Gage Resistance 350Ω ● Pieces per Pack 10	Silver-clad copper wires	-296 to 150°C	25mm	KFL-2-350-C1-11				
		-296 to 150°C	25mm	KFL-2-350-C1-11					
					KFL-1-350-C1-11 16 23	Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-296 to 150°C	1m	KFL-1-350-C1-11 F1M3
								3m	KFL-1-350-C1-11 F3M3
						5m		KFL-1-350-C1-11 F5M3	
Middle-temperature 3-wire cable L-12		-100 to 150°C	1m	KFL-1-350-C1-11 R1M3					
			3m	KFL-1-350-C1-11 R3M3					
			5m	KFL-1-350-C1-11 R5M3					
Middle-temperature 2-wire cable L-11		-100 to 150°C	1m	KFL-1-350-C1-11 R1M2					
			3m	KFL-1-350-C1-11 R3M2					
			5m	KFL-1-350-C1-11 R5M2					
2 polyester-coated copper wires	 30cm 50cm 50cm·1m	-296 to 150°C	30cm	KFL-1-350-C1-11 N30C2					
			50cm	KFL-1-350-C1-11 N50C2					
			1m	KFL-1-350-C1-11 N1M2					
Uniaxial ● Base Size 4 x 2.7 mm ● Gage Length 1 mm ● Gage Resistance 350Ω ● Pieces per Pack 10	Silver-clad copper wires	-296 to 150°C	25mm	KFL-1-350-C1-11					
		-296 to 150°C	25mm	KFL-1-350-C1-11					






KFL Gages ● Uniaxial 350Ω

Pattern	Leadwire Cable – Type and Shape	Operating Temp. Range	Leadwire Length	Model	
KFL-05-350-C1-11 16 23	Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-296 to 150°C	1m	KFL-05-350-C1-11 F1M3	
			3m	KFL-05-350-C1-11 F3M3	
			5m	KFL-05-350-C1-11 F5M3	
		Middle-temperature 3-wire cable L-12	-100 to 150°C	1m	KFL-05-350-C1-11 R1M3
		3m		KFL-05-350-C1-11 R3M3	
		5m		KFL-05-350-C1-11 R5M3	
	Middle-temperature 2-wire cable L-11	-100 to 150°C	1m	KFL-05-350-C1-11 R1M2	
			3m	KFL-05-350-C1-11 R3M2	
			5m	KFL-05-350-C1-11 R5M2	
	2 polyester-coated copper wires	 30cm 50cm • 1m	-296 to 150°C	30cm	KFL-05-350-C1-11 N30C2
				50cm	KFL-05-350-C1-11 N50C2
				1m	KFL-05-350-C1-11 N1M2
	Uniaxial ● Base Size 3.5 x 2.7 mm ● Gage Length 0.5 mm ● Gage Resistance 350Ω ● Pieces per Pack 10	Silver-clad copper wires	-296 to 150°C	25mm	KFL-05-350-C1-11
	KFL-02-350-C1-11 16 23	Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-296 to 150°C	1m	KFL-02-350-C1-11 F1M3
				3m	KFL-02-350-C1-11 F3M3
5m				KFL-02-350-C1-11 F5M3	
Middle-temperature 3-wire cable L-12			-100 to 150°C	1m	KFL-02-350-C1-11 R1M3
		3m		KFL-02-350-C1-11 R3M3	
		5m		KFL-02-350-C1-11 R5M3	
Middle-temperature 2-wire cable L-11		-100 to 150°C	1m	KFL-02-350-C1-11 R1M2	
			3m	KFL-02-350-C1-11 R3M2	
			5m	KFL-02-350-C1-11 R5M2	
2 polyester-coated copper wires		 30cm 50cm • 1m	-296 to 150°C	30cm	KFL-02-350-C1-11 N30C2
				50cm	KFL-02-350-C1-11 N50C2
				1m	KFL-02-350-C1-11 N1M2
Uniaxial ● Base Size 3 x 2.7 mm ● Gage Length 0.2 mm ● Gage Resistance 350Ω ● Pieces per Pack 10		Silver-clad copper wires	-296 to 150°C	25mm	KFL-02-350-C1-11

KFL Gages ● Triaxial 350Ω

Pattern	Leadwire Cable – Type and Shape	Operating Temp. Range	Leadwire Length	Model	
KFL-1-350-D25-11 16 23 Triaxial, 0°/90°/45° ● Base Size 8 mmφ ● Gage Length 1 mm ● Gage Resistance 350Ω ● Pieces per Pack 5	 Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-296 to 150°C	1m	KFL-1-350-D25-11 F1M3	
			3m	KFL-1-350-D25-11 F3M3	
			5m	KFL-1-350-D25-11 F5M3	
	 Middle-temperature 3-wire cable L-12	-100 to 150°C	1m	KFL-1-350-D25-11 R1M3	
			3m	KFL-1-350-D25-11 R3M3	
			5m	KFL-1-350-D25-11 R5M3	
	 Middle-temperature 2-wire cable L-11	-100 to 150°C	1m	KFL-1-350-D25-11 R1M2	
			3m	KFL-1-350-D25-11 R3M2	
			5m	KFL-1-350-D25-11 R5M2	
	 2 polyester-coated copper wires	-296 to 150°C	30cm	KFL-1-350-D25-11 N30C2	
			50cm	KFL-1-350-D25-11 N50C2	
			1m	KFL-1-350-D25-11 N1M2	
	 Silver-clad copper wires	-296 to 150°C	25mm	KFL-1-350-D25-11	
KFL-05-350-D25-11 16 23 Uniaxial, 0°/90°/45° ● Base Size 7.5 mmφ ● Gage Length 0.5 mm ● Gage Resistance 350Ω ● Pieces per Pack 5	 Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-296 to 150°C	1m	KFL-05-350-D25-11 F1M3	
			3m	KFL-05-350-D25-11 F3M3	
			5m	KFL-05-350-D25-11 F5M3	
	 Middle-temperature 3-wire cable L-12	-100 to 150°C	1m	KFL-05-350-D25-11 R1M3	
			3m	KFL-05-350-D25-11 R3M3	
			5m	KFL-05-350-D25-11 R5M3	
	 Middle-temperature 2-wire cable L-11	-100 to 150°C	1m	KFL-05-350-D25-11 R1M2	
			3m	KFL-05-350-D25-11 R3M2	
			5m	KFL-05-350-D25-11 R5M2	
	 2 polyester-coated copper wires	-296 to 150°C	30cm	KFL-05-350-D25-11 N30C2	
			50cm	KFL-05-350-D25-11 N50C2	
			1m	KFL-05-350-D25-11 N1M2	
	 Silver-clad copper wires	-296 to 150°C	25mm	KFL-05-350-D25-11	

KFL Gages ● Uniaxial 350Ω for concrete and lumber

Pattern	Leadwire Cable – Type and Shape	Operating Temp. Range	Leadwire Length	Model
KFL-30-350-C1-11 5	Fluoroplastic-coated high/low-temp. 3-wire cable L-3	-296 to 150°C	1m	KFL-30-350-C1-11 F1M3
			3m	KFL-30-350-C1-11 F3M3
			5m	KFL-30-350-C1-11 F5M3
	Middle-temperature 3-wire cable L-12	-100 to 150°C	1m	KFL-30-350-C1-11 R1M3
			3m	KFL-30-350-C1-11 R3M3
			5m	KFL-30-350-C1-11 R5M3
	Middle-temperature 2-wire cable L-11	-100 to 150°C	1m	KFL-30-350-C1-11 R1M2
			3m	KFL-30-350-C1-11 R3M2
			5m	KFL-30-350-C1-11 R5M2
	3 polyester-coated copper wires	-296 to 150°C	30cm	KFL-30-350-C1-11 N30C3
			50cm	KFL-30-350-C1-11 N50C3
			1m	KFL-30-350-C1-11 N1M3
	2 polyester-coated copper wires	-296 to 150°C	30cm	KFL-30-350-C1-11 N30C2
			50cm	KFL-30-350-C1-11 N50C2
			1m	KFL-30-350-C1-11 N1M2
Uniaxial (for concrete & lumber) <ul style="list-style-type: none"> ● Base Size 36 x 5.2 mm ● Gage Length 30 mm ● Gage Resistance 350Ω ● Applicable Linear Expansion Coefficients 5 (lumber) 11 (concrete) ● Pieces per Pack 10 	Silver-clad copper wires	-296 to 150°C	25mm	KFL-30-350-C1-11